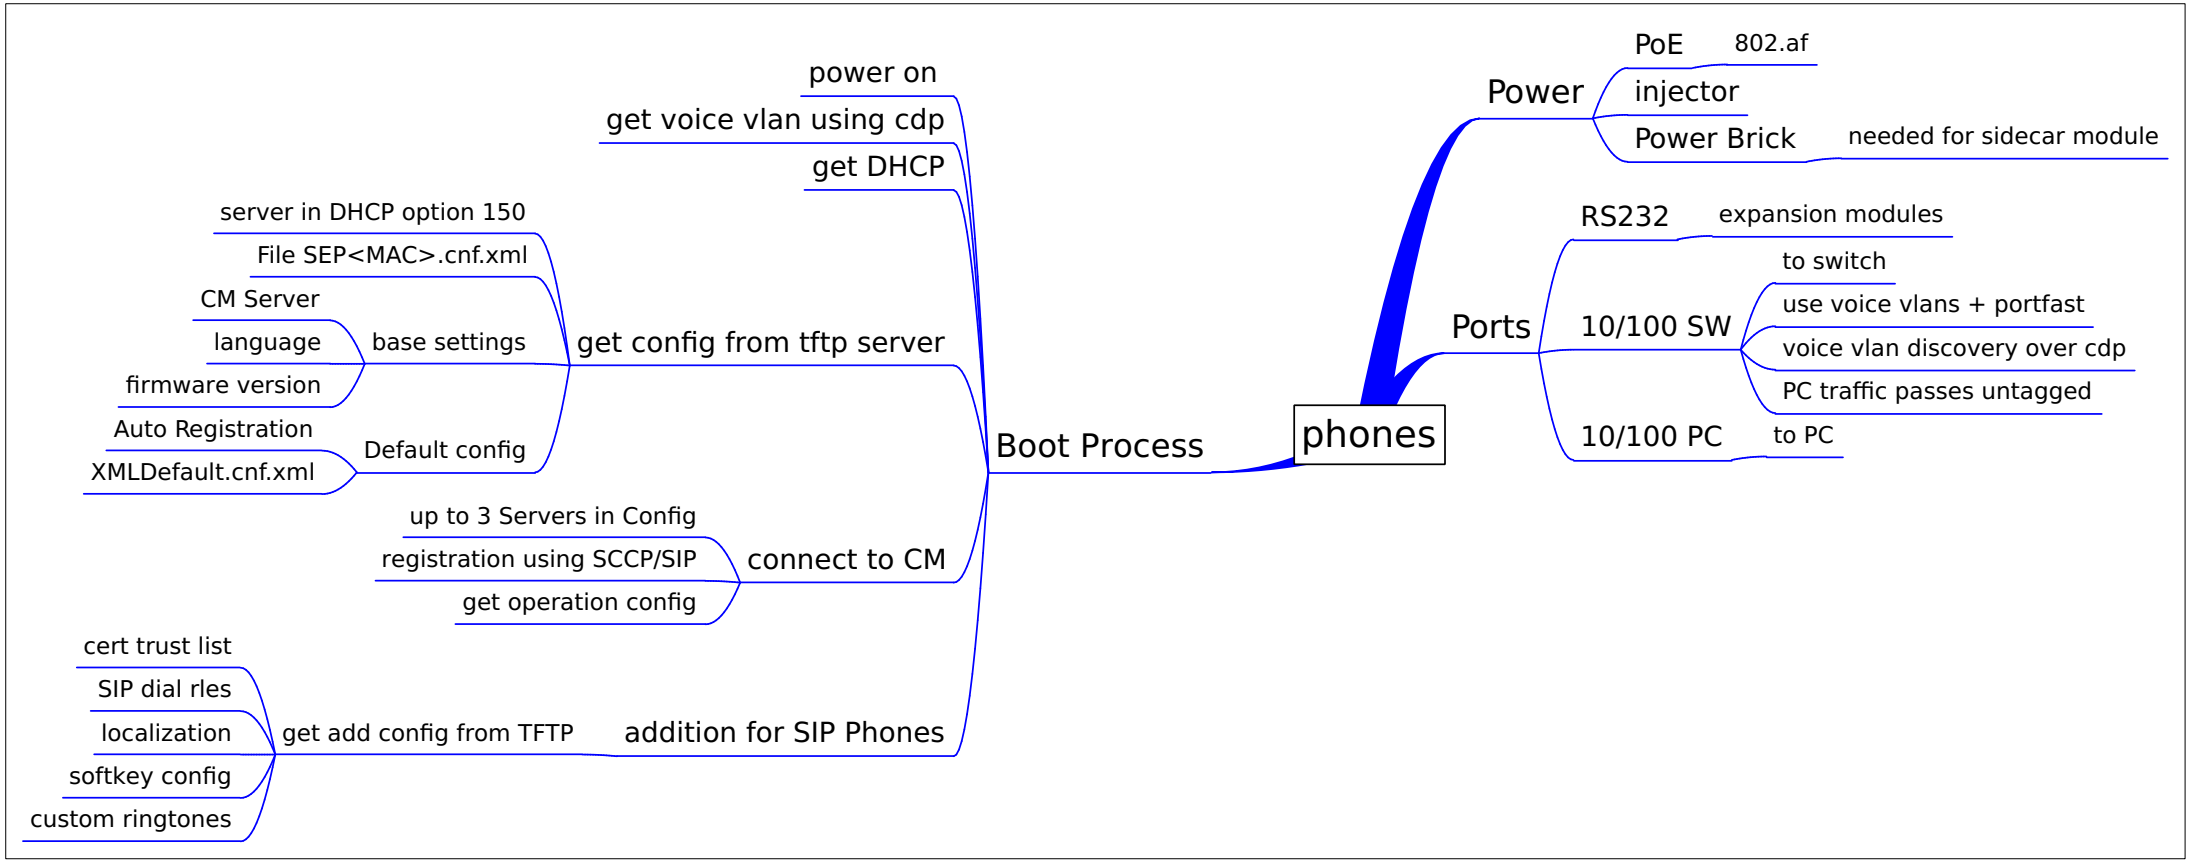
phones
Boot Process
power on
get voice vlan using cdp
get DHCP
get config from tftp server
server in DHCP option 150
File SEP<MAC>.cnf.xml
base settings
CM Server
language
firmware version
Default config
Auto Registration
XMLDefault.cnf.xml
connect to CM
up to 3 Servers in Config
registration using SCCP/SIP
get operation config
addition for SIP Phones
get add config from TFTP
cert trust list
SIP dial rles
localization
softkey config
custom ringtones
Power
PoE
802.af
injector
Power Brick
needed for sidecar module
Ports
RS232
expansion modules
10/100 SW
to switch
use voice vlans + portfast
voice vlan discovery over cdp
PC traffic passes untagged
10/100 PC
to PC